



# DIMS Profibus Interface external


Item No. 500214



With the DIMS Profibus Interface it's possible to connect the DLS/FLS sensors directly to a Profibus-Master.

The DIMS Profibus interface is a IP20 Profibus/RS422 converter and is mountable on a DIN rail 35 mm. It supports Baudrate up to 12 Mbaud. Furthermore, it's possible to control up to 10 DLS/FLS Laser Distance Sensors which represents a cost efficient solution.

### Application example

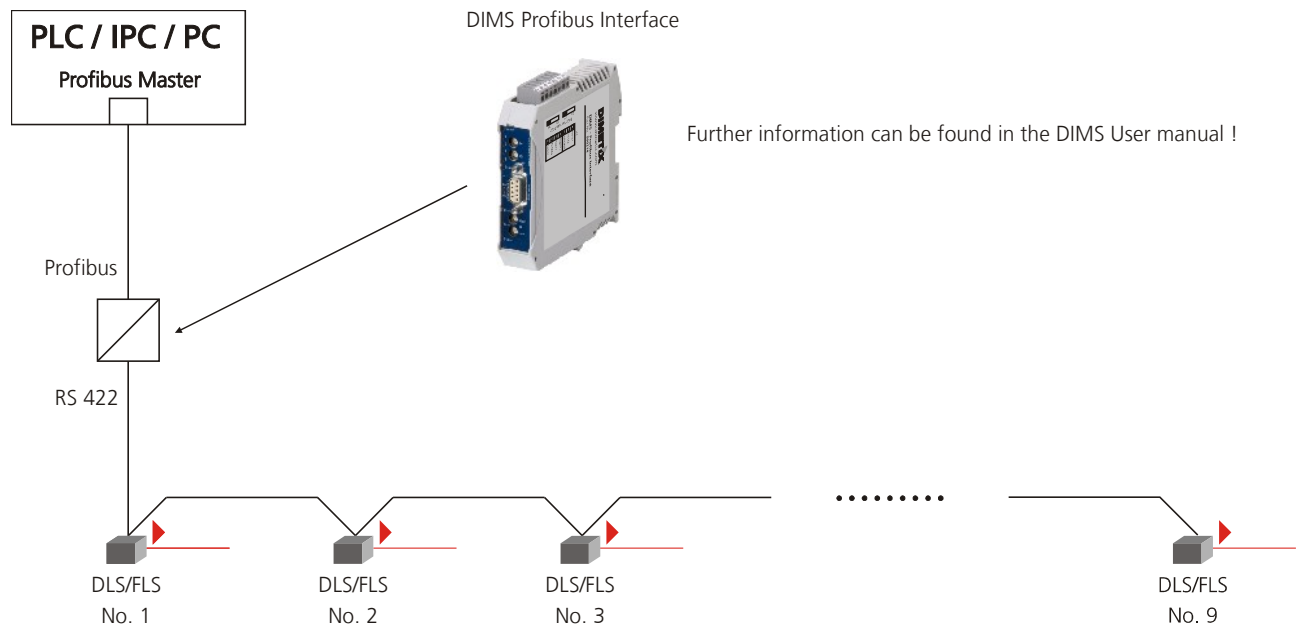

### Order information

Item No.	Description	Packaging unit
500214	DIMS Profibus Interface external Profibus/RS-422 converter, IP20 module, mountable on 35 mm DIN rail applicable for DLS/FLS	1 piece

12. Nov. 2009 / Subject to change without notice

500214\_DIMS\_Profibus interface external\_EN\_V2.odt