



Numeric digital display 6 digits


Item No. 500215



For displaying the measuring results with millimeter precision, connect the measuring device DLS or FLS directly to this numeric display directly via the serial interface RS-232 or RS-422. This numeric display can be connected directly to the DLS or FLS through the serial interface RS-232 or RS-422.

Numeric display, which can be connected externally for convenient metering.

Dimensions:

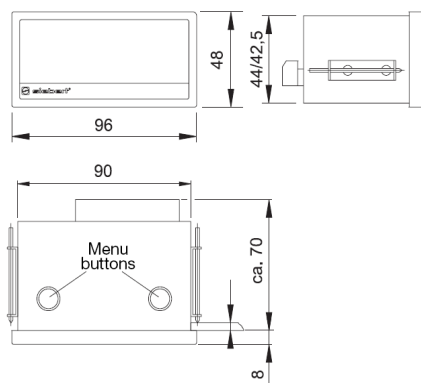


Panel cut out 92 x 45 mm

Specification:

General:	Power supply	18...30 V DC, galvanically isolated
	Power consumption	approx. 4 VA
	Housing	Plastic, black
	Connection	Plug-in terminal strips
	Protection type	IP40
	Operating temperature	0 ... 50°C
	Storage temperature	-20 ... 70°C
Relative humidity	95% (non condensing)	
	Numeric display	0 ... 9, various ASCII characters, height 14 mm
Display:	LED	red
	Front frame	96 x 48 mm
	Weight	approx. 170 g
	Dimensions	see sketch
	Reading distance	1 ... 5 m

Application example:

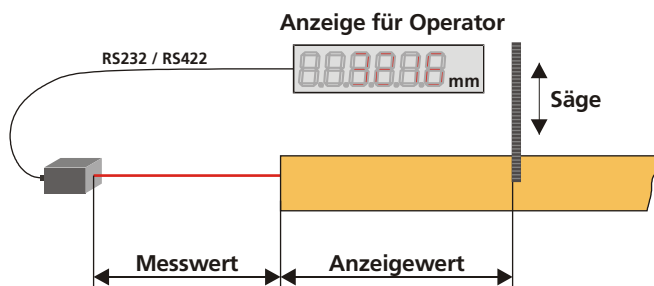

Order information

Item No.	Description	Packaging unit
500215	Numeric digital display 6 digits Char. height 14mm; LED red; RS-232/485; Reading distance: 1...5m applicable for DLS/FLS	1 piece